


DESICCANT DRYAIR 500 VRF



- 
- > Lower footprint/weight per m³/hr
 - > A unique triple point control on all machines over 1500 m³/hr, measuring the regeneration temperature onto the wheel, the wheel off temperature (wet air) and the RH or Dew point of the air being dried. This combination ensures the amount of energy input is relevant to the moisture being extracted. This can be applied to 500 m³/hr units as option extra.
 - > Numerous options available, pre-heaters and coolers, post heaters and coolers, humidifiers and many other variations as special machines.
 - > Filters up to F7 as standard with HEPPA & ULPA available.
 - > Highly efficient Silica Gel Rotor for efficiency & durability, high moisture removal efficiency with the lowest energy costs.
 - > Various regeneration options available on units above 1500 m³/hr. All options are fully modulating.

APPLICATIONS

√ DRYING √ SILOS √ MILITARY STORAGE √ ARCHIVE STORAGE √ FREEZER STORAGE

www.hvac.nl

+31 255 52 24 20



info@hvac.nl

SPECIFICATIONS

Process Airflow Nominal	500	m ³ / hr
Process Pre filter	1 x 400 x 300 pleated panel G4	No / Size / Grade
High Perf Silica Gel Rotor	450 x 100	mm
Desiccant Wheel Rotation Speed	17	RPH
Process Fan Model	DD SRER-11-0200	
Motor Power	0.37	kW
Moisture Removal		
20°C @ 40% RH	3.054	kg / hr
20°C @ 60% RH	3.894	kg / hr
25°C @ 60% RH	4.332	kg / hr
30°C @ 80% RH	5.124	kg / hr
Total Pressure / External Pressure	628 / 449	Pa
Regeneration Airflow Nominal	182	m ³ / hr
Regeneration Filter	1 x 400 x 300 pleated panel G4	No / Size / Grade
Heater Option	Electric Thyristor control	Electric PTC
Heater Power (on startup)	7.6	kW
Heater Power (after initial start)	4.5	kW
Heater option	Electric Gas Steam	***
Fan Model	DDAS-AA140	
Motor Power	0.176	kW
Total Pressure / External Pressure	290 / 190	Pa
Electrical Supply	3p/N/E 50 / 60 Hz	1p/N/E
Voltage	380 415	V / Ac
Electrical Input Power (on start up)	8.146	kW
Amps per phase	12.39 11.35 -----	A/Phase **
ΔPa Process / Regeneration / Pre-purge	47 / 69 / 50	Pa
Dimensions	900 x 640 x 710	L x W x H mm
Process Inlet	175	mm
Process Outlet	175	mm
Regeneration Inlet	150	mm
Regeneration Outlet	150	mm
Weight	125	kg


* pressure readings at dirty filter condition

PERFORMANCE TECHNICAL DRAWINGS AVAILABLE UPON REQUEST

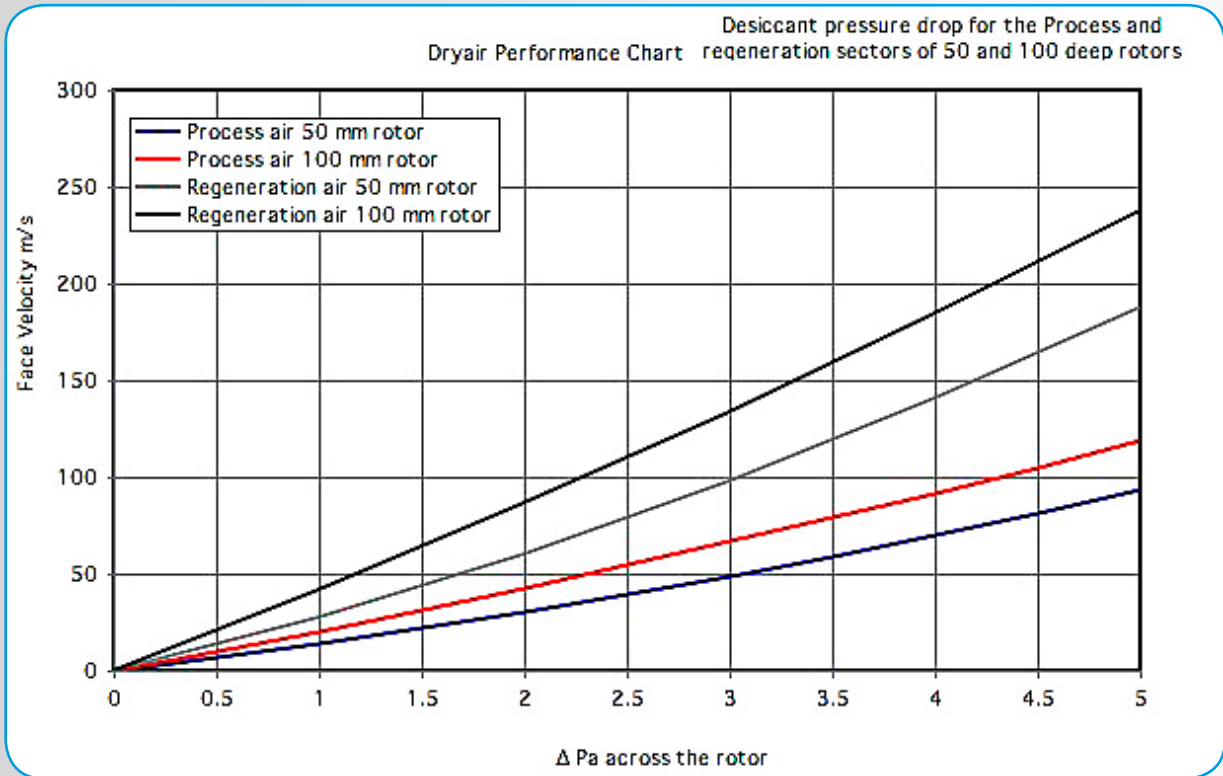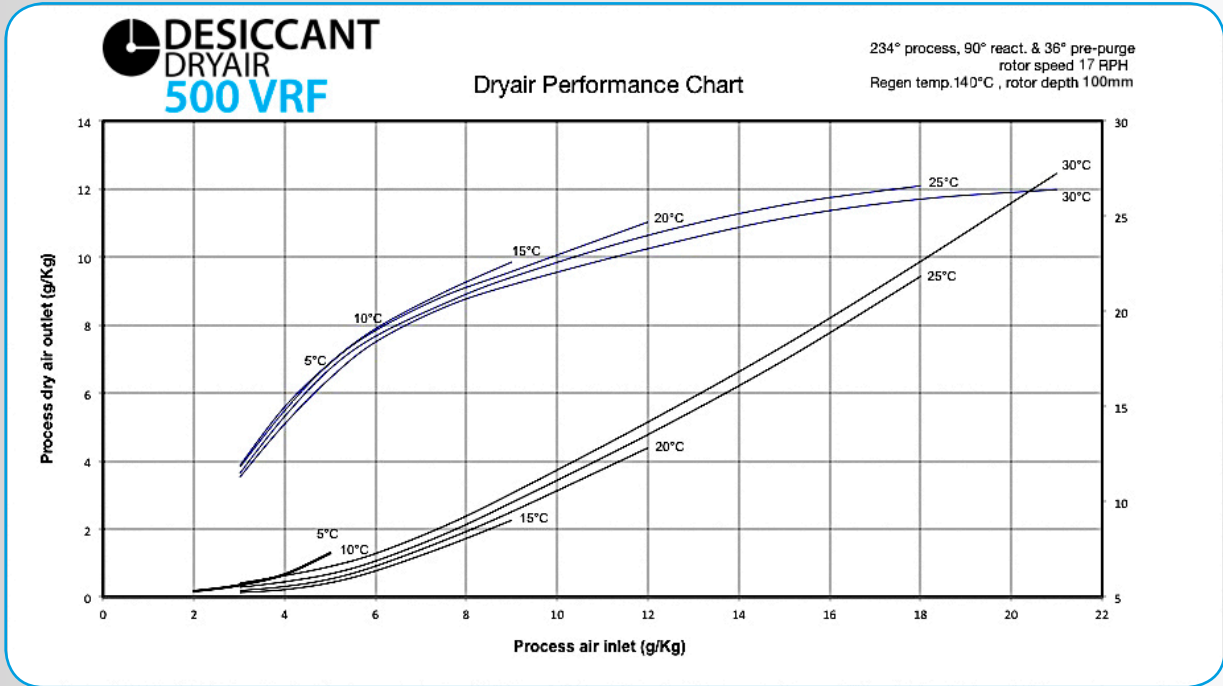

PERFORMANCE TECHNICAL DRAWINGS AVAILABLE UPON REQUEST

Process Fan Curve for the 750 VRF

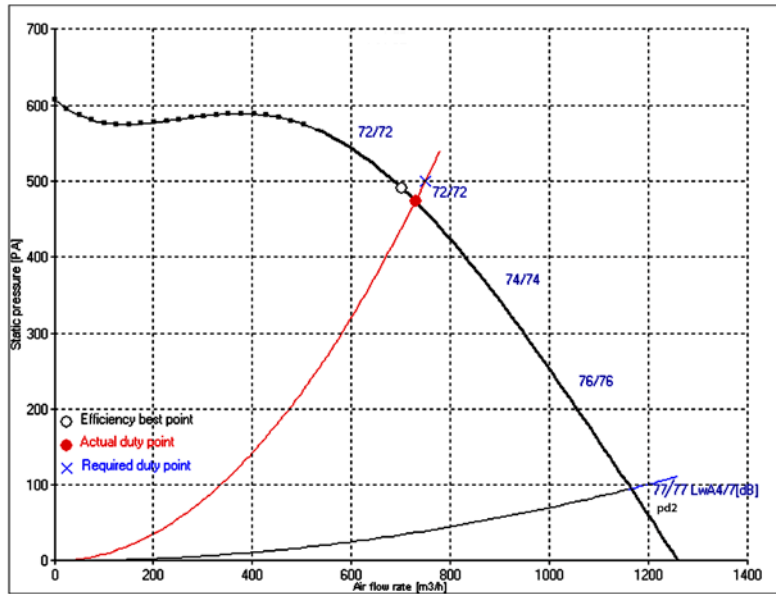

Regeneration Fan Curve for the 750 VRF

